

Vacuum regulator


These valves, made of anodized aluminium, are able to regulate the vacuum and flux in operation.

The degree of vacuum and flux vary in a directly proportional way.

Operation

Membrane-piston reducer.

Working pressure from 650 to 1 mm/Hg, with a capacity of up to 65mc/h Working temperature from -10°C to +90°C.

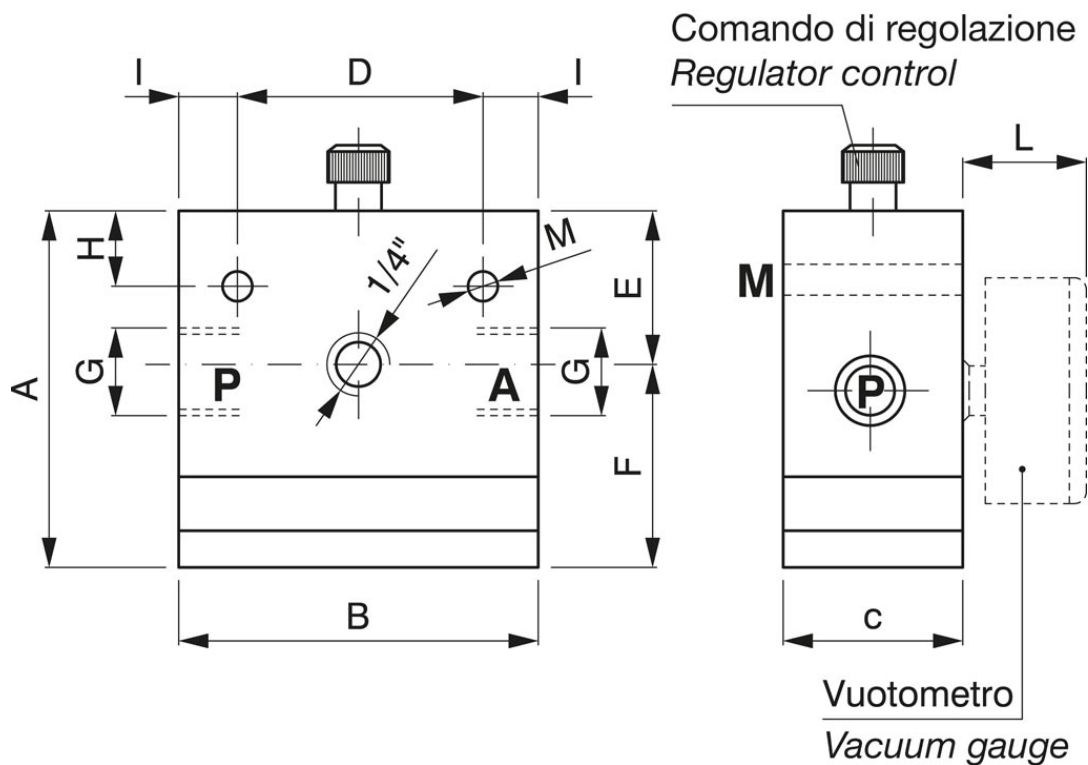

Art. RT

Art.	Capacity cum/h	A	B	C	D	E	F	G	H	I	L	M
RT 1/4"	6	89	60	40	40	46	43	1/4"	20	10	35	5.5
RT 1/2"	20	100	100	50	71	46	55	1/2"	20	14	35	8.5
RT 3/4"	40	100	100	50	71	46	55	3/4"	20	14	35	8.5
RT 1"	80	110	120	60	90	50	60	1"	15	15	35	8.5

